

X Series


Outdoor Stage / Rental LED Display

FOCONO

Your Local
LED
Application



LIGHT AND THINNER

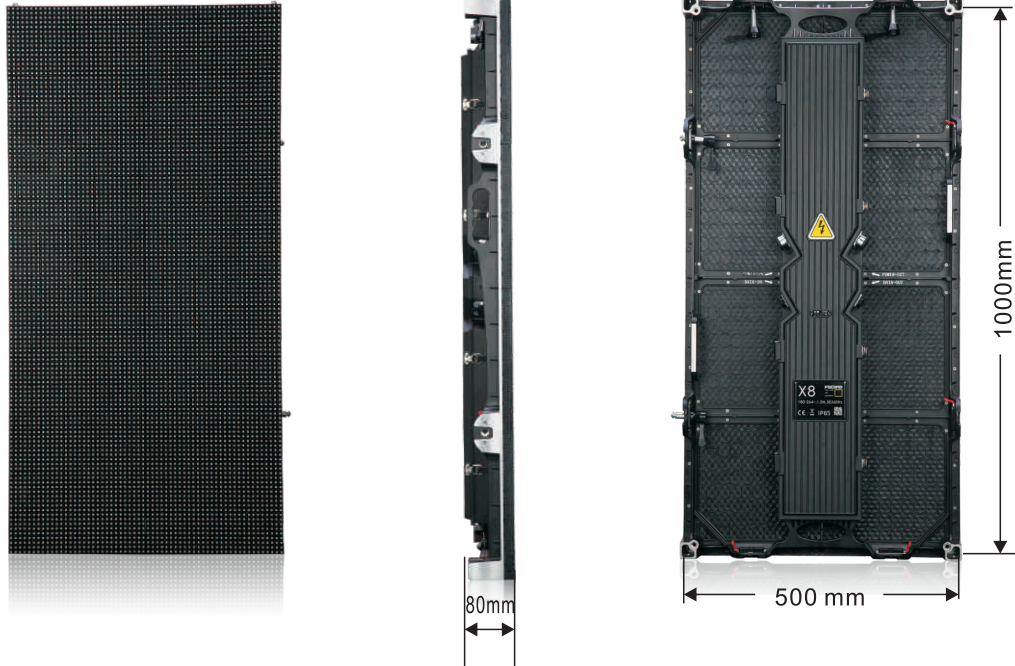


Easy for installation, cost-effective for transportation.

FAST ASSEMBLING




Cabinet locking system can connect the cabinet without any tools, quick installation within 8 seconds.

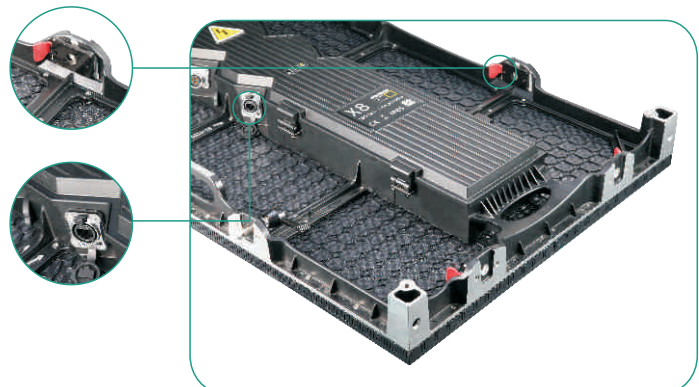

MISTAKE TRACKING SYSTEM



Faster and easier
problem shooting.

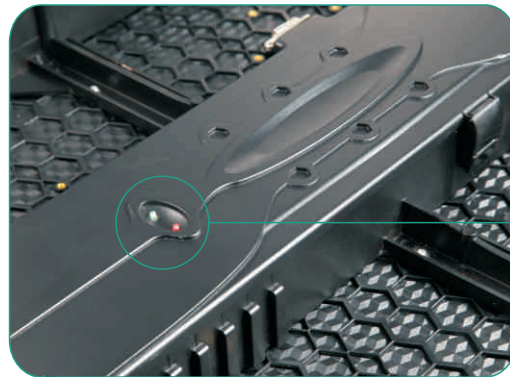

ZERO NOISE DESIGN



No fan design
No noise

4"H" PERFORMANCE

4H

High brightness: 5500nits ; High gray scale: 65536 levels ;
High refresh rate: 2000Hz; High contrast ratio: 5000:1.

PARAMETERS

Value	X3	X4	X6	X8
Pixel pitch	3.906mm	4.808mm	6.25mm	8.33mm
Brightness	5500 nits	5500 nits	5500 nits	5500 nits
Pixel configuration	SMD	SMD	SMD	SMD
Colours	281 trillion	281 trillion	281 trillion	281 trillion
Refresh rate	≥1440	≥1440	≥1440	≥1920
Pixel matrix per panel	128X256	104X208	80X160	60X120
Pixel matrix per sq.m	65544	43258	25600	14401
Viewing angle (H/V)	140/140 deg.	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (max/avg)	800/280 W/sq.m	750/260 W/sq.m	600/210 W/sq.m	800/280 W/sq.m
IP rate	IP65/IP43	IP65/IP43	IP65/IP43	IP65/IP43
Input voltage (AC)	110/240	110/240	110/240	110/240
Panel size(L x W x H)	500X1000X80mm	500X1000X80mm	500X1000X80mm	500X1000X80mm
Panel weight	14kgs	14kgs	14kgs	14kgs

Applications

Outdoor commercial advertising,
Sport,Event,Concert,Musical
festival,Entertainment etc. rental
occasions.

