

X Series


Indoor Stage / Rental LED Display

FOCONO

Your Local
LED
Application



LIGHT AND THINNER

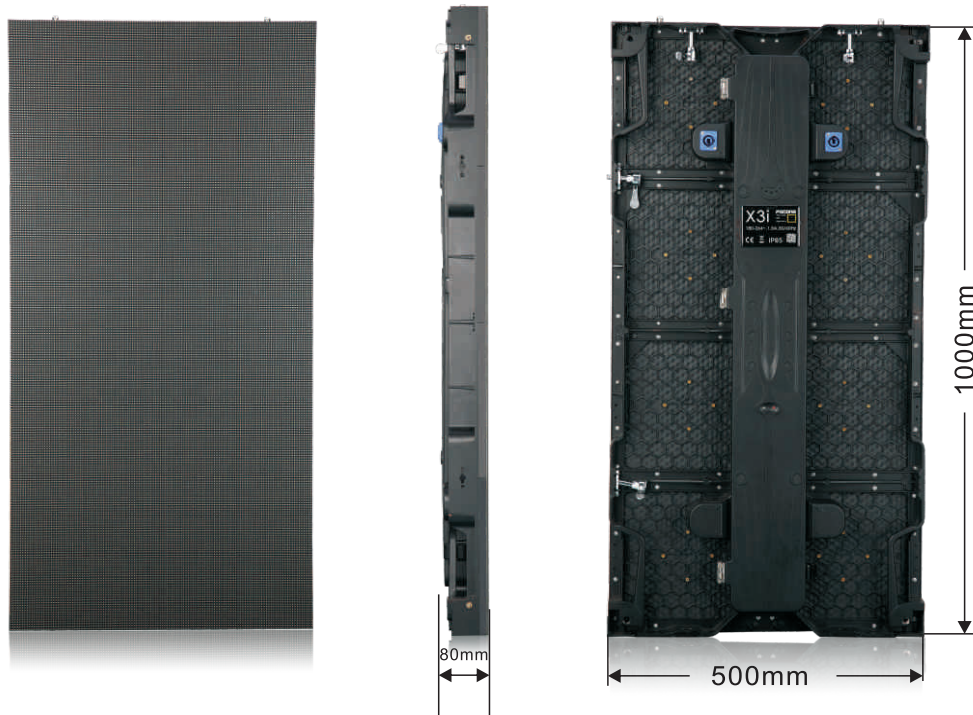

Easy for installation, cost-effective for transportation.

FAST ASSEMBLING




Cabinet locking system can connect the cabinet without any tools, quick installation within 8 seconds.



MISTAKE TRACKING SYSTEM



Faster and easier
problem shooting.

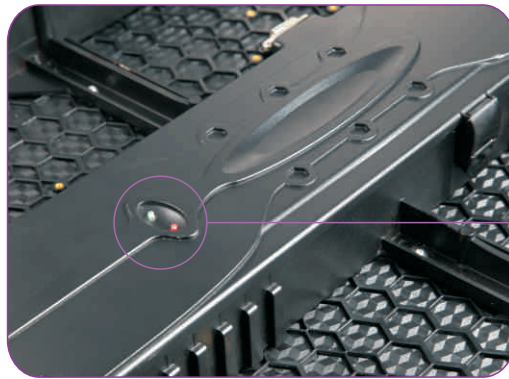

ZERO NOISE DESIGN



No fan design
No noise

4"H" PERFORMANCE

4H

High brightness: 1500nits ; High gray scale: 65536 levels ;
High refresh rate: 1920Hz; High contrast ratio: 5000:1.

PARAMETERS

Value	X2i	X3i	X4i	X5i	X6i
Pixel pitch	2.604mm	3.125mm	4.167mm	5.208mm	6.25mm
Brightness	1100 nits	1100 nits	1500 nits	1500 nits	1500 nits
Pixel configuration	SMD	SMD	SMD	SMD	SMD
Colours	281 trillion	281 trillion	281 trillion	281 trillion	281 trillion
Refresh rate	≥1080	≥1440	≥1920	≥1440	≥1440
Pixel matrix per panel	192X384	160X320	120X240	96X192	80X160
Pixel matrix per sq.m	147474	102400	57590	36868	25600
Viewing angle (H/V)	140/140 deg.	140/140 deg.	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (max/avg)	600/210 W/sq.m	700/240 W/sq.m	710/240 W/sq.m	650/220 W/sq.m	650/220 W/sq.m
IP rate	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20
Input voltage (AC)	110/240	110/240	110/240	110/240	110/240
Panel size(L x W x H)	500X1000X80mm	500X1000X80mm	500X1000X80mm	500X1000X80mm	500X1000X80mm
Panel weight	12kgs	11kgs	11kgs	11kgs	11kgs

Applications

Temporary stage, TV studio,
nightclub & bar, theater, school,
conference room, hotel,
shopping mall, events, etc.

