

S Series

Outdoor Rental LED Display

FOCONO

Your Local
LED
Application




LIGHT AND THINNER




Decrease the transportation and labor cost.

CURVE-SHAPED ASSEMBLING OPTIONAL



Can be shaped into curved screen and 10 degree plus or minus tolerance for both external arc and internal arc.

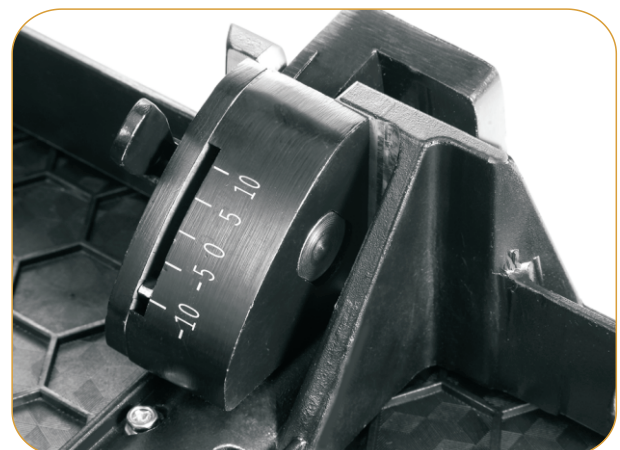

FAST ASSEMBLING



The side-lock assures the cabinet joint within 8 seconds.

MISTAKE TRACKING SYSTEM



Visible mistake tracking function.



4"H" PERFORMANCE

4H



Vivid picture



High refresh rate

High brightness: 5500nits ;
High gray scale: 65536 levels ;
High refresh rate: 2000Hz;
High contrast ratio:5000:1 .

PARAMETERS

Value	S3	S6
Pixel pitch	3.91mm	6.25mm
Brightness	5500 nits	5500 nits
Pixel configuration	SMD	SMD
Colours	281 trillion	281 trillion
Refresh rate	≥1440	≥1920
Pixel matrix per panel	128X128	80X80
Pixel matrix per sq.m	65536	25600
Viewing angle (H/V)	140/140 deg.	140/140 deg.
Power consumption (max/avg)	800/280 W/sq.m	800/280 W/sq.m
IP rate	IP65/IP43	IP65/IP43
Input voltage (AC)	110/240	110/240
Panel size(L x W x H)	500X500X80mm	500X500X80mm
Panel weight	9kgs	9kgs

Applications

Outdoor commercial advertising,
sport,event, concert,
musical festival,wntertainment etc.
rental occasions.

