

S Series



Indoor Rental LED Display

FOCONO

Your Local
LED
Application




LIGHT AND THINNER

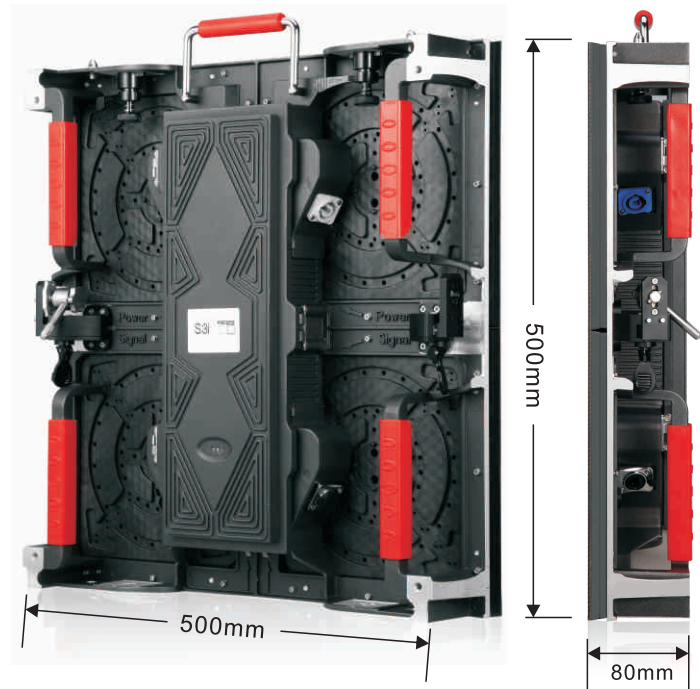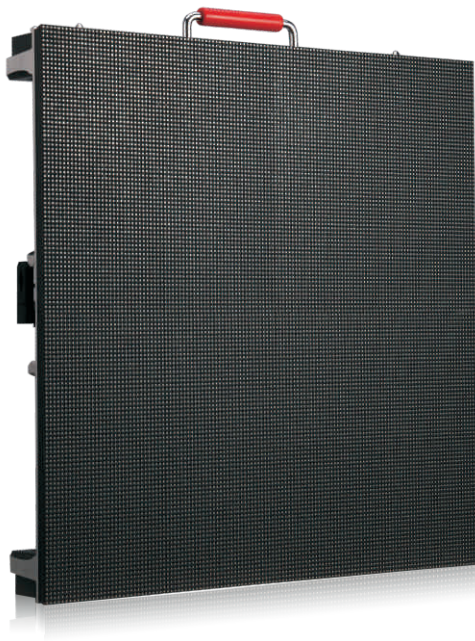


The magnesium material makes the cabinet 20% lighter than before.


CURVE-SHAPED ASSEMBLING OPTIONAL



Can be shaped into curved screen and 10 degree plus or minus tolerance for both external arc and internal arc.

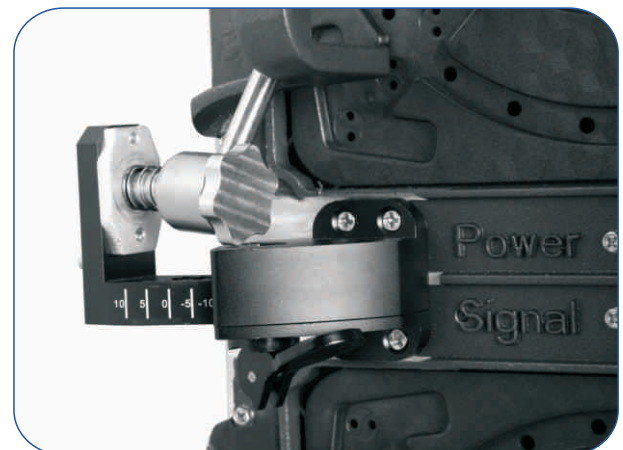

FAST ASSEMBLING




The side-lock assures the cabinet joint within 8 seconds.

MISTAKE TRACKING SYSTEM



Visible mistake tracking function.

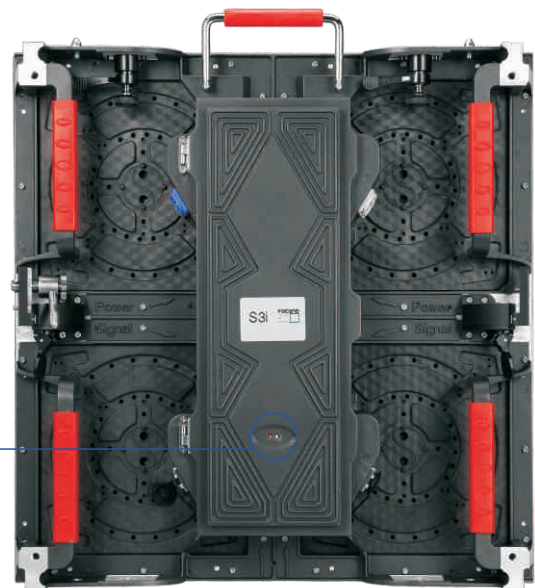

4"H" PERFORMANCE



Vivid picture



High refresh rate

High brightness: 1500nits ;
High gray scale: 65536 levels ;
High refresh rate: 1920Hz;
High contrast ratio:5000:1.

PARAMETERS

Value	S3i	S4i	S6i
Pixel pitch	3.91mm	4.81mm	6.25mm
Brightness	1000 nits	1000nits	1500 nits
Pixel configuration	SMD	SMD	SMD
Colours	281 trillion	281 trillion	281 trillion
Refresh rate	≥1440	≥1440	≥1440
Pixel matrix per panel	128X128	104X104	80X80
Pixel matrix per sq.m	65536	43264	25600
Viewing angle (H/V)	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (max/avg)	600/210 W/sq.m	710/240 (max/avg)	600/210 W/sq.m
IP rate	IP40/IP20	IP40/IP20	IP40/IP20
Input voltage (AC)	110/240	110/240	110/240
Panel size(L x W x H)	500X500X80mm	500X500X80	500X500X80mm
Panel weight	8kgs	8kgs	8kgs

Applications

Temporary stage, TV studio,
nightclub & bar, theater, school,
conference room, hotel,
shopping mall, events, etc.

