

D Series

Outdoor Fixed Giant LED Display

FOCONO

Your Local
LED
Application




ULTRALIGHT DESIGN




Aluminum cabinet, save 40% structure cost for the same display area compared with the common fixed cabinet.

LIGHT-TRAPPED VENTILATION




30% wind transmittance ratio,
weakening the wind pressure
to the display;
The lightproof design assures
the contrast ratio of the display.



AIR-CONDITIONER FREE



The hollow cabinet design can keep the cabinet in the condition of good heat dissipation and working without air-conditioner.

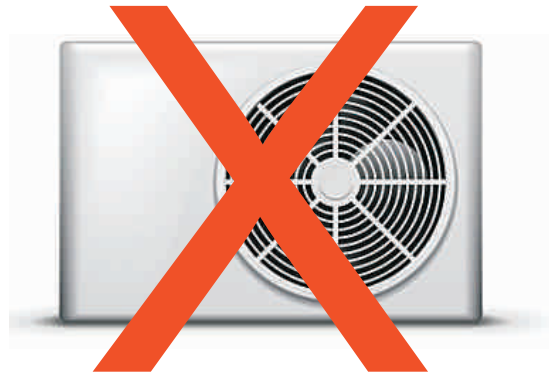

ENERGY-SAVING



Reduce 30% power consumption compared with the common P10.




Save 30% energy




EASY ASSEMBLING



The PCB connection replaces the traditional electronic wire, saving the installation time.

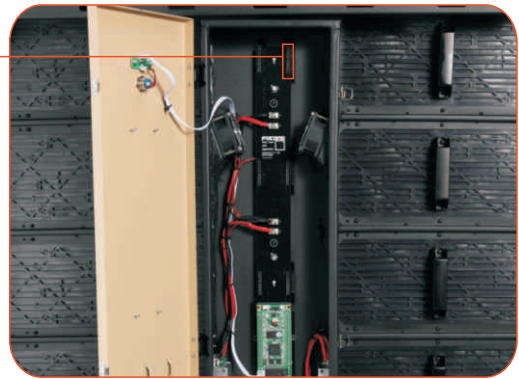

100% WATERPROOF LED MODULE

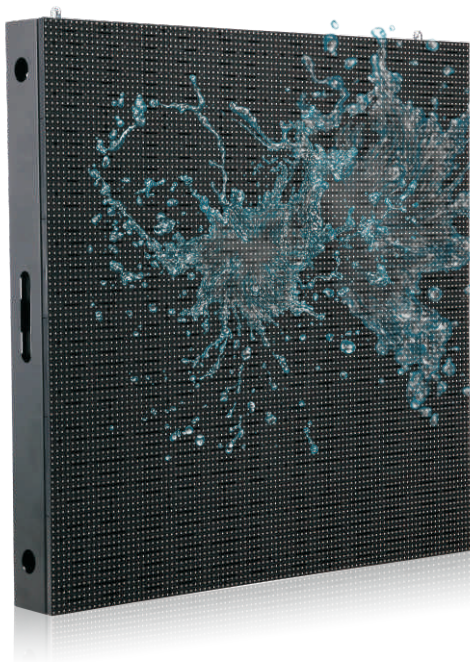

IP65, 100% waterproof led module.

PARAMETERS

Value	D10	D13	D16
Pixel pitch	10mm	13.33mm	16mm
Brightness	8500 nits	8000	8500
Pixel configuration	SMD	DIP	DIP
Colours	281 trillion	281 trillion	281 trillion
Refresh rate	≥ 1000	≥ 1000	≥ 1000
Pixel matrix per panel	96X96	72X72	60X60
Pixel matrix per sq.m	1000	5625	3906
Viewing angle (H/V)	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (max/avg)	730/250 W/sq.m	500/170 W/sq.m	500/170 W/sq.m
IP rate	IP65/IP43	IP65/IP43	IP65/IP43
Input voltage (AC)	110/240	110/240	110/240
Panel size(L x W x H)	960X960X110mm	960X960X130	960X960X130
Panel weight(Alu.)	24kgs	24kgs	24kgs

Applications

outdoor advertisement media,
government & enterprise
project culture & tourism, sports,
commercial real estate.

